Delta

QUARE

www.quaredesign.com

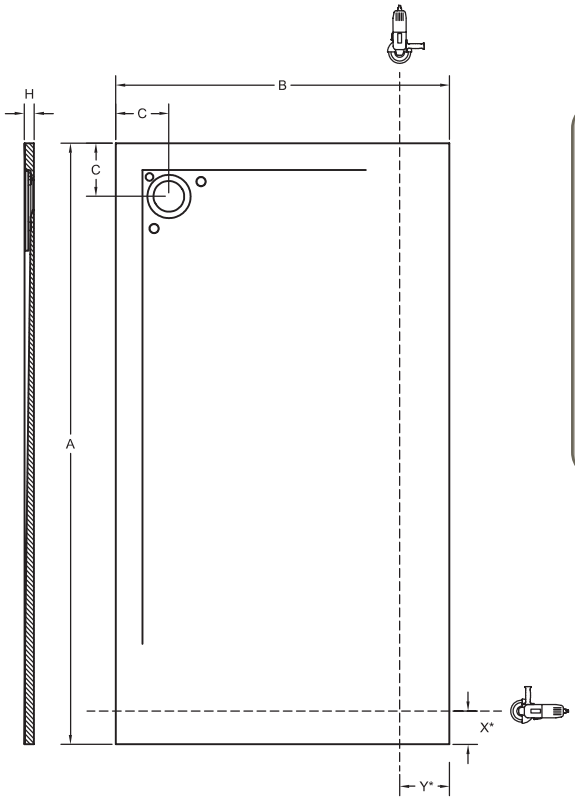

Resin + Mineral fillers + Coating

5 YEARS GUARANTEE

Anti-slip coating. DIN 51097.

Coating with excellent resistance to hydrolysis.

High coating UV resistant.

SUPERIOR HARDNESS coating (<0.01 mm according to UNE EN 14688; maximum allowed 0.1 mm).

Antibacterial treatment R<2 ISO 22196.

Special cuts. It can be cut on site by diamond saw.

Recessed, raised or on Quare feet installation. Consult installation manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

47 kg/m²

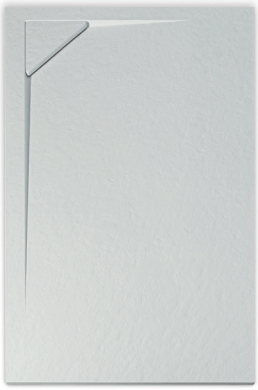

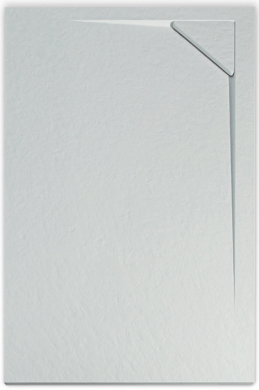

(*) Maximum recommended cut. For other cuts, please consult us.

B (mm)		A (mm)									
		900	**1000**	**1100**	**1200**	**1300**	**1400**	**1500**	**1600**	**1700**	**1800**
800	**C**	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	30	30
	X*	0	100	200	300	100	200	300	100	200	300
	Y*	0	0	0	0	0	0	0	0	0	0
900	**C**	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	30	30
	X*	0	100	200	300	100	200	300	100	200	300
	Y*	100	100	100	100	100	100	100	100	100	100
1000	**C**	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	30	30
	X*	0	100	200	300	100	200	300	100	200	300
	Y*	200	200	200	200	200	200	200	200	200	200

PIZARRA

A 900 - 1800 | B 800-1000

Class C / PN24 / Class 3

STANDARD COLOURS

PURE WHITE, CREMA, GREY, GREGE, SILK GREY, FANGO

MACCHIATO, TERRA, GRAFITE, ANTRACITE, BLACK, NATURAL WHITE

SPECIAL COLOURS

GOLD, FOSSIL, TERRACOTTA

RAL

213 RAL

NCS

1950 NCS

WASTES

EXTRA FLAT SHOWER WASTE

Flow rate 35 l/mn
Height 54 mm

VERTICAL SHOWER WASTE

Flow rate 35 l/mn
Height 96 mm

HIGH FLOW SHOWER WASTE

Flow rate 50 l/mn
Height 80 mm

WASTE COVER

RESIN WASTE COVER IN PIZARRA FINISH (SLATE), COLOURED